


## Wool Classics Card




**memo**

**kvadrat**

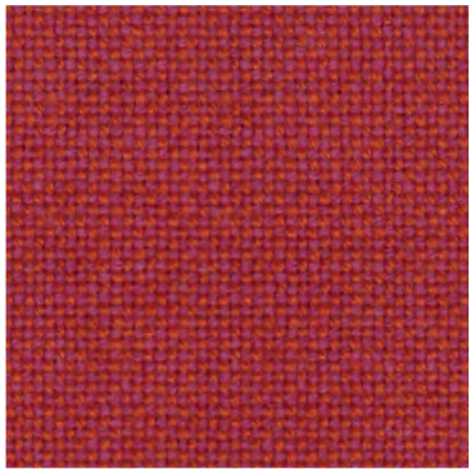


Hallingdal 65 680



Steelcut Trio 3 63 6




Remix 3 686



Remix 3 606




Divina Melange 3 647




Divina Melange 3 557



Divina Melange 3 617




Hallingdal 65 110



Divina Melange 3 687




Remix 3 662



Hallingdal 65 166




Remix 3 143



Steelcut Trio 3 176




Hallingdal 65 130



Steelcut Trio 3 133




Remix 3 152




Hallingdal 65 173




Remix 3 173



Divina Melange 3 147




Remix 3 123



Hallingdal 65 116




Remix 3 133



Divina Melange 3 120




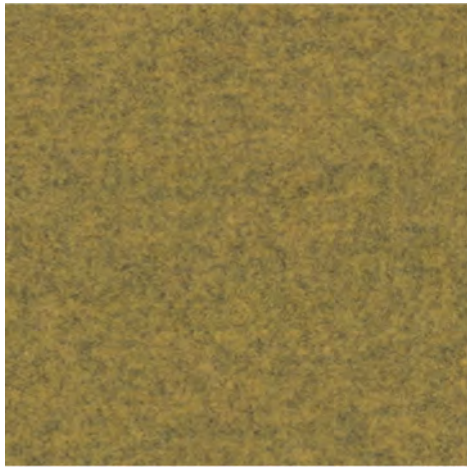

Divina Melange 3 427



Remix 3 406



Remix 3 516



Steelcut Trio 3 416



Divina Melange 3 547



Remix 3 672



Steelcut Trio 3 453




Hallingdal 65 407



Steelcut Trio 3 226




Divina Melange 3 227




Remix 3 962




Remix 3 113



Hallingdal 65 368



Steelcut Trio 3 124




Steelcut Trio 3 376




Divina Melange 3 967



Steelcut Trio 3 996




Remix 3 136



Steelcut Trio 3 916




Hallingdal 65 944




Hallingdal 65 126



Divina Melange 3 977




Divina Melange 3 937

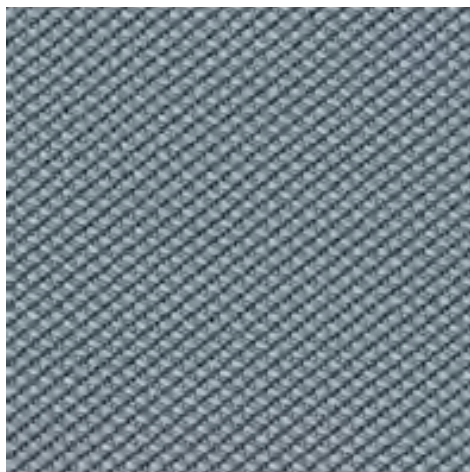

Steelcut Trio 3 713



Divina Melange 3 731




Hallingdal 65 733



Hallingdal 65 723



Remix 3 816



Steelcut Trio 3 906




Remix 3 743



Steelcut Trio 3 746



Remix 3 753



Steelcut Trio 3 983




Steelcut Trio 3 796




Remix 3 873



Remix 3 996




Remix 3 716




Steelcut Trio 3 883



Divina Melange 3 170




Divina Melange 3 180



Remix 3 163



Hallingdal 65 180




Steelcut Trio 3 195



Steelcut Trio 3 153



Hallingdal 65 190



Remix 3 183

**Divina Melange 3 3**

Designed by Finn Sködt  
Memo Group 11


**Application** Offices, hotels, institutions, domestic use.

**Description** 100% new wool. Width app. 59 inches (150 cm). Weight app. 840 g/lin.m, 27.0 oz/ly. Piece dyed. Colour differences may occur.

**Selvedge** ↔

**Abrasion:** App. 45,000 rubs acc. to the Martindale method EN ISO 12947. **Lightfastness** (ISO) 5-7. **Pilling** (EN ISO) 3. **Fastness to rubbing** (ISO) dry 4-5, wet 3-4. **Sound absorption** (EN ISO 354) 0.60/Class C (flat), 0.70/Class C (waved). **Airflow** 678 Pa s/m. **Flame resistance:** AS/NZS 1530.3. ASTM E84 class A adhered. ASTM E84 Class B unadhered. BS 5852 Crib 5. BS 5852 Part 1. BS 5867 Part 2 Type B. EN 1021-1/2. EN 13501, C-s1, dO adhered. IMO FTP Code 2010:Part 8. NF D 60 013. NFPA 260. NFPA 701 with treatment. SN 198 898 5.3 with treatment. UNI 9175 11M. US Cal. Bull. 117-2013. ONORM B1 / 01. (Copy of test report available).

**Care** Please see the ISO symbols. Iron without steam. Disinfection, see kvadrat.dk.

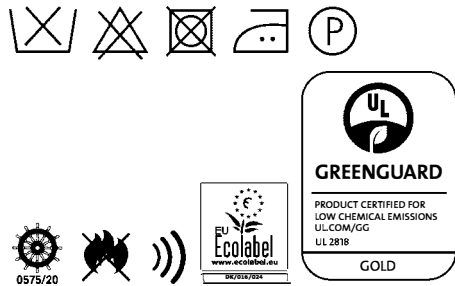**Remix 33**

Designed by Giulio Ridolfo  
Memo Group 9


**Application** Offices, hotels, institutions, domestic use. Great durability.

**Description** 90% new wool, worsted, 10% nylon. Width app. 55 inches (140 cm). Weight app. 13.5 oz/ly (420 g/lin.m). Material dyed. Colour differences may occur.

**Selvedge** ↔

**Abrasion:** App. 100,000 rubs acc. to the Martindale method EN ISO 12947. **Lightfastness** (ISO) 5-7. **Pilling** (EN ISO) 4. **Fastness to rubbing** (ISO) dry 4-5, wet 3-5. **Sound absorption** (EN ISO 354) 0.55/Class D (flat), 0.80/Class B (waved). **Airflow** 465 Pa s/m. **Flame resistance:** AS/NZS 1530.3. AS/NZS 3837 Class 2. ASTM E84 class A. BS 5852 Crib 5 with treatment. BS 5852 ignition source 3. BS 5852 part 1. EN 1021-1/2. GB 50222 B1 with treatment. IMO FTP Code 2010:Part 7 with treatment. IMO FTP Code 2010:Part 8. NF D 60 013. NFPA 260. SN 198 898 5.3 with treatment. UNI 9175 11M. US Cal. Bull. 117-2013. ONORM B1 / 01. (Copy of test report available).

**Care** Please see the ISO symbols.

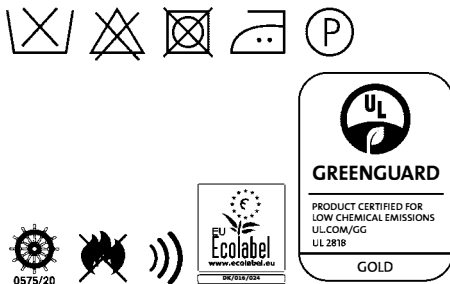**Hallingdal 65**

Designed by Nanna Ditzel  
Memo Group 12

**Application** Offices, hotels, institutions, domestic use. Great durability.

**Description** 70% new wool, 30% viscose. Width 51 inches (130 cm). Weight app. 795 g/lin.m, 25.5 oz/ly. Material dyed.

Foreign fibre may occur in light colours. Colour differences may occur.

**Selvedge** ↕


**Abrasion:** App. 100,000 rubs acc. to the Martindale method EN ISO 12947. **Lightfastness** (ISO) 5-7. **Pilling** (EN ISO) 3-4.

**Fastness to rubbing** (ISO) dry 4-5, wet 3-5. **Sound absorption** (EN ISO 354) 0.45/Class D (flat), 0.70/Class C (waved).

**Airflow** 182 Pa s/m. **Flame resistance:** AS/NZS 1530.3. AS/NZS 3837 Class 2. ASTM E84 class A adhered. ASTM E84 Class B unadhered. BS 5852 Crib 5. BS 5852 part 1. EN 1021-1/2.

GB 50222 B1 with treatment. IMO FTP Code 2010:Part 8. NF D 60 013. NFPA 260. SN 198 898 5.3 with treatment. UNI 9175 11M. US Cal. Bull. 117-2013. ONORM B1 / 01. (Copy of test report available).

**Care** Please see the ISO symbols. Disinfection, see kvadrat.dk.

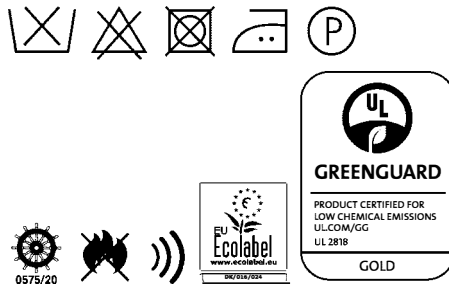**Steelcut Trio 3 3**

Designed by Frans Dijkmeijer and Giulio Ridolfo  
Memo Group 11

**Application** Offices, hotels, institutions, domestic use. Great durability.

**Description** 90% new wool, worsted, 10% nylon. Width app. 55 inches (140 cm). Weight app. 24.7 oz/ly (770 g/lin.m). Yarn dyed. Colour differences may occur.


**Selvedge** ↕

**Abrasion:** App. 100,000 rubs acc. to the Martindale method EN ISO 12947. **Lightfastness** (ISO) 5-7. **Pilling** (EN ISO) 4.

**Fastness to rubbing** (ISO) dry 4-5, wet 3-5. **Sound absorption** (EN ISO 354) 0.70/Class C (flat), 0.95/Class A (waved). **Airflow** 910 Pa s/m. **Flame resistance:** AS/NZS 1530.3. AS/NZS 3837 Class 2. BS 5852 Crib 5 with treatment.

BS 5852 ignition source 3. BS 5852 part 1. EN 1021-1/2. GB 50222 B1 with treatment. IMO FTP Code 2010:Part 8. NF D 60 013. NFPA 260. SN 198 898 5.3 with treatment. UNI 9175 11M. US Cal. Bull. 117-2013. ONORM B1 / 01. (Copy of test report available).

**Care** Please see the ISO symbols.

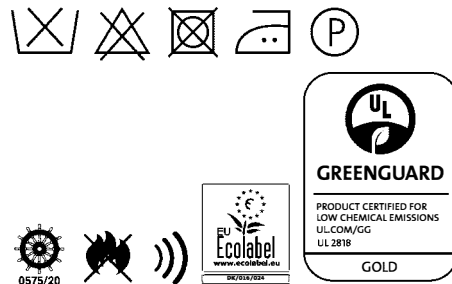

Quality and environmental system accreditation according to ISO 9001 and ISO 14001.

\*ACT® Registered Certification Marks

Encouraging the use of sustainable fibres. Durable and high quality.

Hazardous substances restricted.

Contact and further information [www.kvadrat.dk](http://www.kvadrat.dk)

10 year warranty



US contact info: 1-800-620-9309